
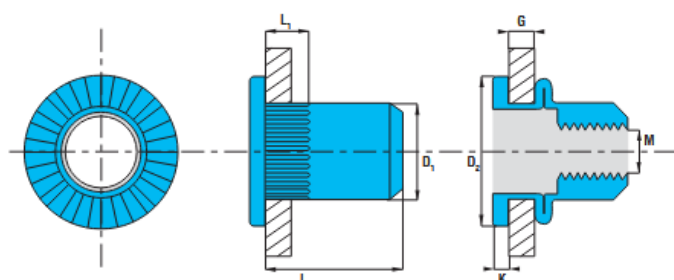



ECROU A SERTIR TP INOX A2



M	D ₁	D ₂	K	L	L ₁	G
Ø (mm)	Ø (mm)	Ø (mm)	(mm)	(mm)	(mm)	min-max (mm)
M3	4.9	7.0	0.9	10.0	4.0	0.5-3.0
M4	5.9	9.0	1.0	10.0	4.0	0.3-3.0
				11.5	5.0	3.1-4.0
M5	6.9	10.0	1.0	12.0	4.0	0.3-3.0
				15.0	5.0	3.1-4.0
M6	8.9	13.0	1.5	14.5	4.0	0.5-3.0
				16.0	5.5	3.1-4.5
M8	10.9	16.0	1.5	16.0	4.0	0.5-3.0
				18.5	6.5	3.1-5.5
M10	12.9	19.0	2.0	17.0	4.0	0.5-3.0
				22.0	7.0	3.1-6.0

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
				
M (mm)	(mm)	(Nm)	(N)	(N)
M3	5.0	1.5	3 800	900
M4	6.0	7.0	6 800	2 600
M5	7.0	10.0	11 700	2 900
M6	9.0	20.0	18 000	4 900
M8	11.0	28.0	24 000	6 800
M10	13.0	38.0	29 000	7 800